


Article number: 0.E Test number: 1 Mean Count: Nec 30
 1/2 LOT:321 (FIKSAJLI) 30/1 DK
 Tests: 2/ 500 v = 400 m/min. FV = 9.84 cN

TestCounter: 7.4M
 TesterNo: 4716-xxxx

USTER QUALITY REPORT

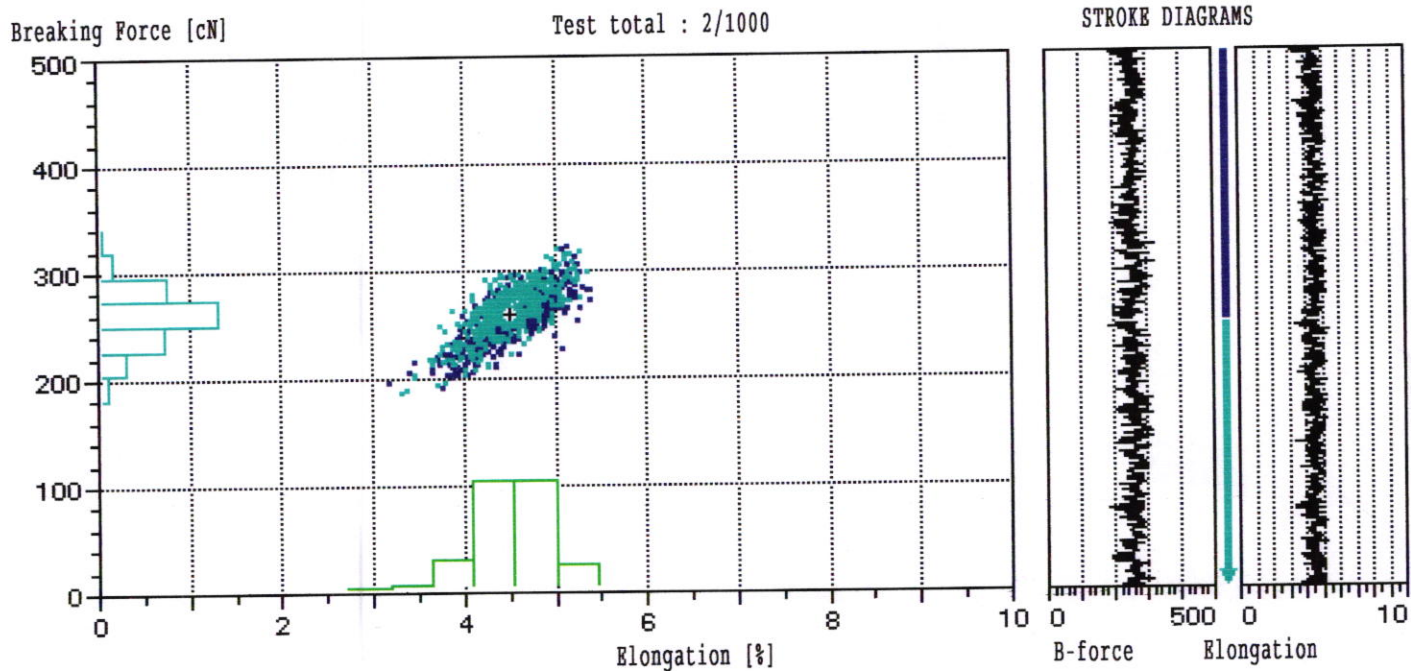

Color key: Tests 1 2

B-force	Elongation	Tenacity	B-work
[cN]	[%]	[cN/tex]	[cN.cm]

Overall results: (total)

2 Tests / 1000	Single tests			
Mean values	258.8	4.52	13.15	320.0
CV%	8.81	7.87	8.81	14.98
s +/-	22.8	0.36	1.16	47.9
Q95% +/-	1.4	0.02	0.07	3.0
Max values	320.8	5.39	16.30	471.4
Min values	186.8	3.16	9.49	169.4
P0.01:(0)				
P0.05:(0)				
P0.1:(1)	186.8	3.16	9.49	169.4
P0.5:(5)	194.1	3.45	9.86	192.7
P1.0:(10)	202.1	3.64	10.27	205.0

Weak points (0cN,) F = 0

Stil O.E Örnek ID 02222 Nom. numara Nec 30 Nom. büküm
Testler 2 / 1 v= 400 m/min t= 1 min Ölçüm yarığı 4 Kısa elyaf

Tablo

Artikel RIETER Materyal sinifi İplik Maki. Nr. 1-DK
IG:1/2 LOT:321 (FIKSAJLI)

Toplam testler : 2 / 2 Tek test(ler)

Nr	U%	CVm	CVm 3m	CVm 10m	DR 1.5m 5%	İnce -40%	İnce -50%	Kalin +35%	Kalin +50%	Neps +200%	Neps +280%	Rel. Num ±
	%	%	%	%	%	/km	/km	/km	/km	/km	/km	%
1	12.00	15.16	2.74	1.87	12.4	765.0	52.5	872.5	130.0	667.5	95.0	-0.8
2	12.12	15.25	2.69	1.70	13.8	740.0	45.0	812.5	90.0	520.0	67.5	0.8
Ortalama	12.06	15.20	2.72	1.78	13.1	752.5	48.8	842.5	110.0	593.8	81.3	0.0
CV												
Q95												
Max	12.12	15.25	2.74	1.87	13.8	765.0	52.5	872.5	130.0	667.5	95.0	0.8
Min	12.00	15.16	2.69	1.70	12.4	740.0	45.0	812.5	90.0	520.0	67.5	-0.8