


Article number: 0.E Test number: 3 Mean Count: Nec 16
 1/2 LOT:320 (FIKSAJLI) 16/1 DK
 Tests: 2/ 500 v = 400 m/min. FV = 18.45 cN

TestCounter: 7.4M
 TesterNo: 4716-xxxx

USTER QUALITY REPORT

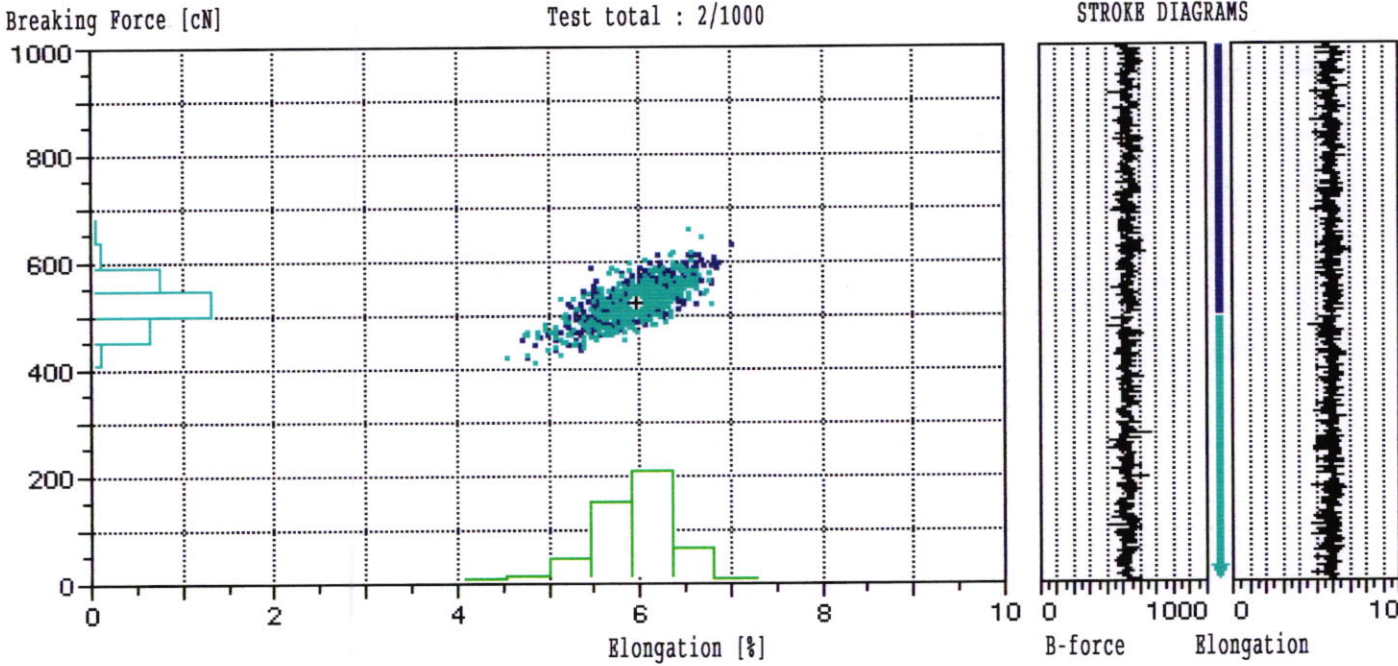

Color key: Tests 1 2

B-force	Elongation	Tenacity	B-work
[cN]	[%]	[cN/tex]	[cN.cm]

Overall results: (total)

	2 Tests / 1000	Single tests		
Mean values	525.0	5.95	14.22	828.2
CV%	6.78	6.50	6.78	11.81
s +/-	35.6	0.39	0.96	97.8
Q95% +/-	2.2	0.02	0.06	6.1
Max values	658.4	7.01	17.84	1114
Min values	411.6	4.54	11.15	497.0
P0.01: (0)				
P0.05: (0)				
P0.1 : (1)	411.6	4.54	11.15	497.0
P0.5 : (5)	422.6	4.75	11.45	533.3
P1.0 : (10)	436.5	4.87	11.83	579.6

Weak points (0cN,) F = 0

Stil O.E Örnek ID 02223 Nom. numara Nec 16 Nom. büküm
Testler 2 / 1 v= 400 m/min t= 1 min Ölçüm yarığı 3 Kısa elyaf

Tablo

Artikel RIETER Materyal sinifi İplik Maki. Nr. 3-DK
İG:1/2 LOT:320 (FIKSAJLI)

Toplam testler : 2 / 2 Tek test(ler)

Nr	U%	CVm	CVm 3m	CVm 10m	DR 1.5m 5% %	İnce -40% /km	İnce -50% /km	Kalin +35% /km	Kalin +50% /km	Neps +200% /km	Neps +280% /km	Rel Num. ± %
1	9.60	12.09	2.70	1.88	16.0	37.5	0.0	197.5	7.5	10.0	2.5	0.7
2	9.59	12.07	3.18	2.57	15.7	35.0	0.0	165.0	5.0	12.5	2.5	-0.7
Ortalama	9.59	12.08	2.94	2.23	15.8	36.3	0.0	181.3	6.3	11.3	2.5	0.0
CV Q95												
Max	9.60	12.09	3.18	2.57	16.0	37.5	0.0	197.5	7.5	12.5	2.5	0.7
Min	9.59	12.07	2.70	1.88	15.7	35.0	0.0	165.0	5.0	10.0	2.5	-0.7